




Motorola V60s Speakers Replacement

Written By: Eric Freeman

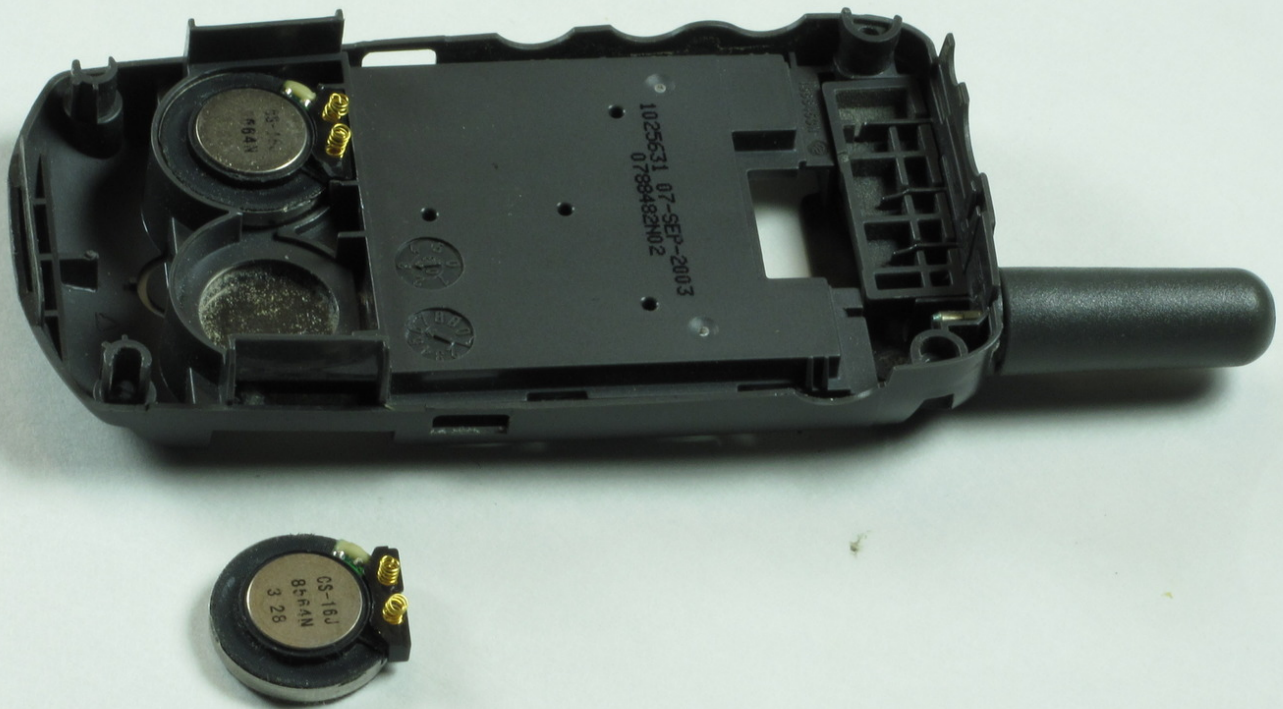

INTRODUCTION

This is a guide showing how to replace the Motorola V60 speakers.

TOOLS:

- [Spudger](#) (1)
 - [T6 Torx Screwdriver](#) (1)
-

Step 1 — Battery



- Remove battery cover by pushing down release lever at top of phone while prying off cover.
- Set cover aside.

Step 2




- Remove battery by grabbing it near the bottom and lifting out.

Step 3 — Speakers




- Unscrew four corner screws with T6 screwdriver.
- Note: Top screws are silver and short while bottom screws are black and longer.

Step 4

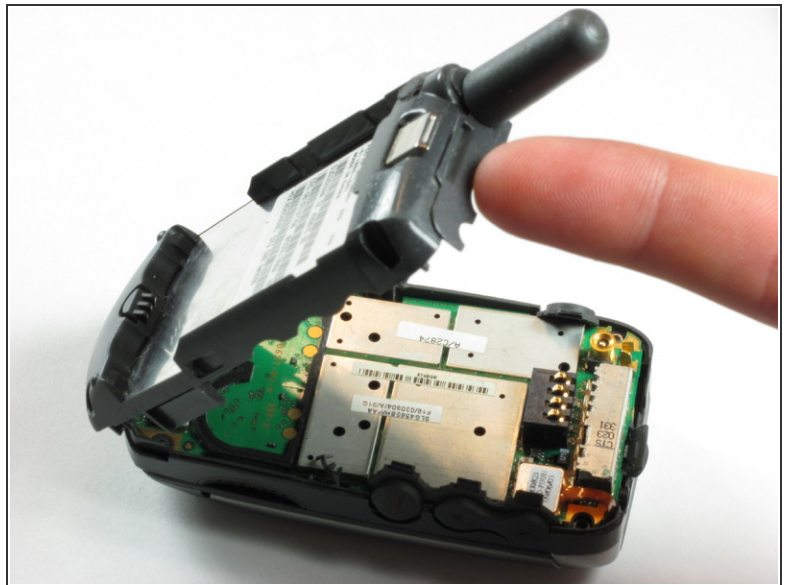

- Pry off back chassis by wedging spudger in crevice between back panel and phone and lifting.

Step 5

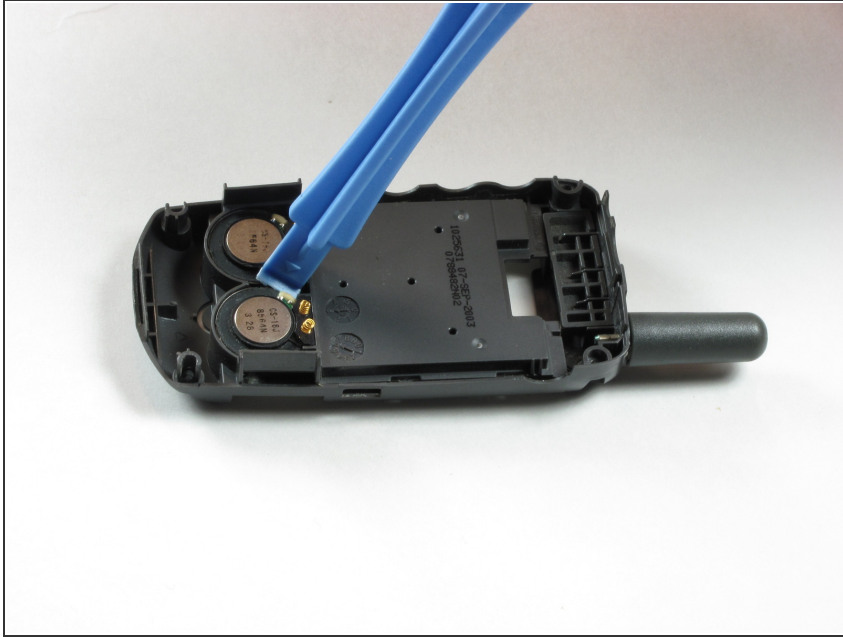

- Insert spudger between speaker and back chassis and lifting.
- Note: This may take some effort.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-06-29 11:20:27 AM.